

Quick Start Guide

Websense IQ-Series Appliance
Web Security Appliance



Before you begin...

- Determine appliance rack location.
- Determine appliance IP addresses for network deployment.
- The database download initiated at the end of this setup may take a few hours. The download progress message on the Status > General page disappears when the download is complete.
- For networks with a firewall, open destination UDP port 123 and select the appropriate TCP ports to open for cloud communication: standard (80, 443) or alternative (8081, 8002, 80, 443). See the Getting Started Guide for details.
- If you plan to control VLAN traffic in your network, see the Getting Started Guide for information about VLAN tags.

1

Initial Websense blueSKY Security Gateway Settings



- Ensure that your Websense blueSKY Security Gateway account is established and that you have performed your first directory synchronization.
- Log in to Websense blueSKY:
<https://bluesky.websense.net/portal>
- In the Websense blueSKY console, click Network Devices and enter new appliance information.

2

IQ-Series Appliance Setup and Configuration

- Verify accessory box content.





Power Cable



Bezel

- Rack the appliance and plug it in.
- Power the appliance on and allow the boot sequence to complete.

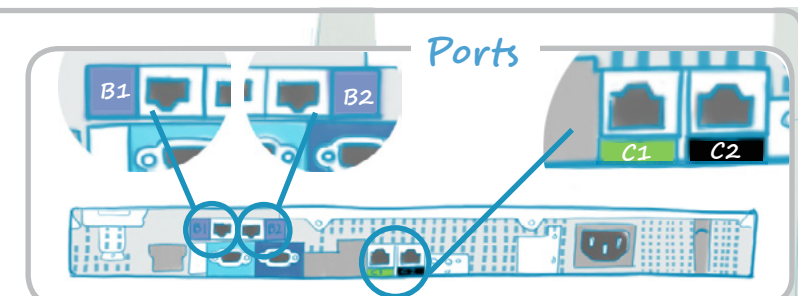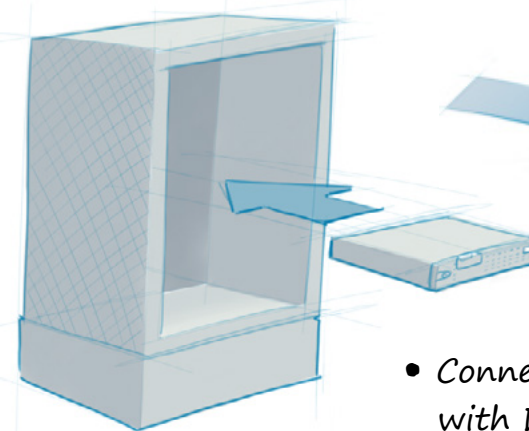


- Connect a computer with DHCP enabled to the IQ-Series appliance C1 interface. Wait a few moments, until the automatic network setup is complete, to begin appliance configuration.

- Log in to the appliance via a web browser connection (<https://169.254.0.2>; credentials are admin/admin)
- Complete the IQ-Series appliance First-Time Configuration Wizard.
- Log off the appliance and disconnect the computer from the appliance.



Continued On Back

3 Connect the Appliance to Your Network

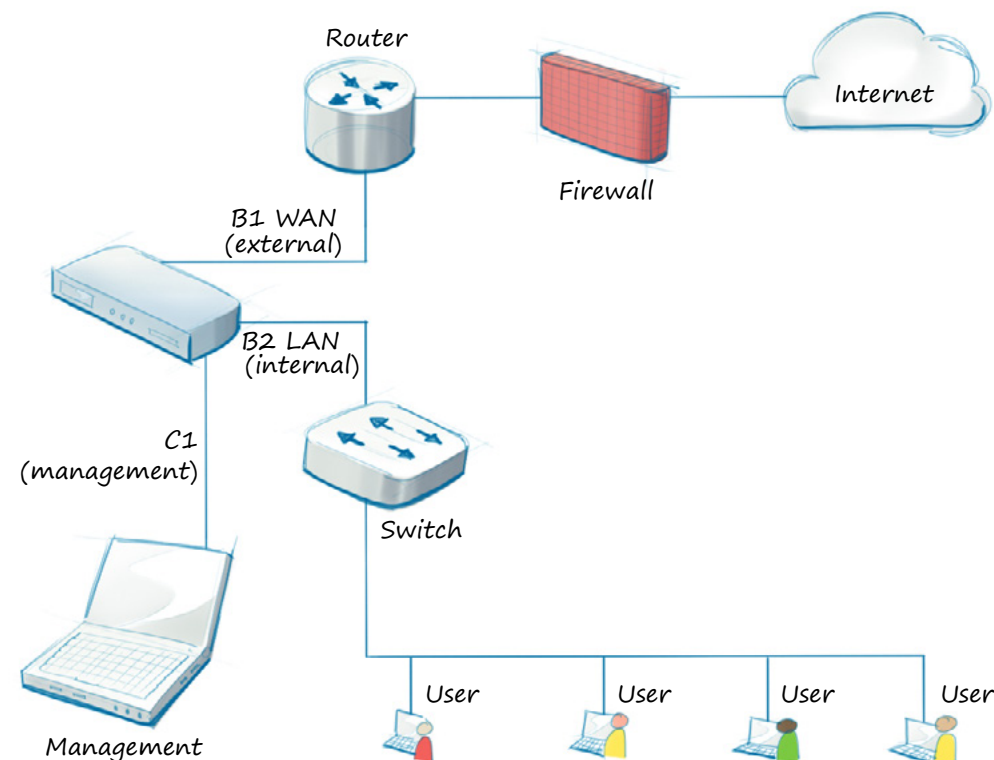

4 Appliance Registration




- In the Websense blueSKY console, click Network Devices.
- Select the row that contains your new appliance and click Register.
- Copy the registration key to the clipboard.

5 Registration Completion and Password Change

- Reconnect to the appliance using the management IP address (C1) or the default address (169.254.0.2) and log in.
- Change the appliance password if you have not already done so.
- Paste the Websense blueSKY registration key into the Registration Key field.

Initial database download begins automatically. All Web traffic is permitted during this process. The download progress message on the Status > General page disappears when the download completes.

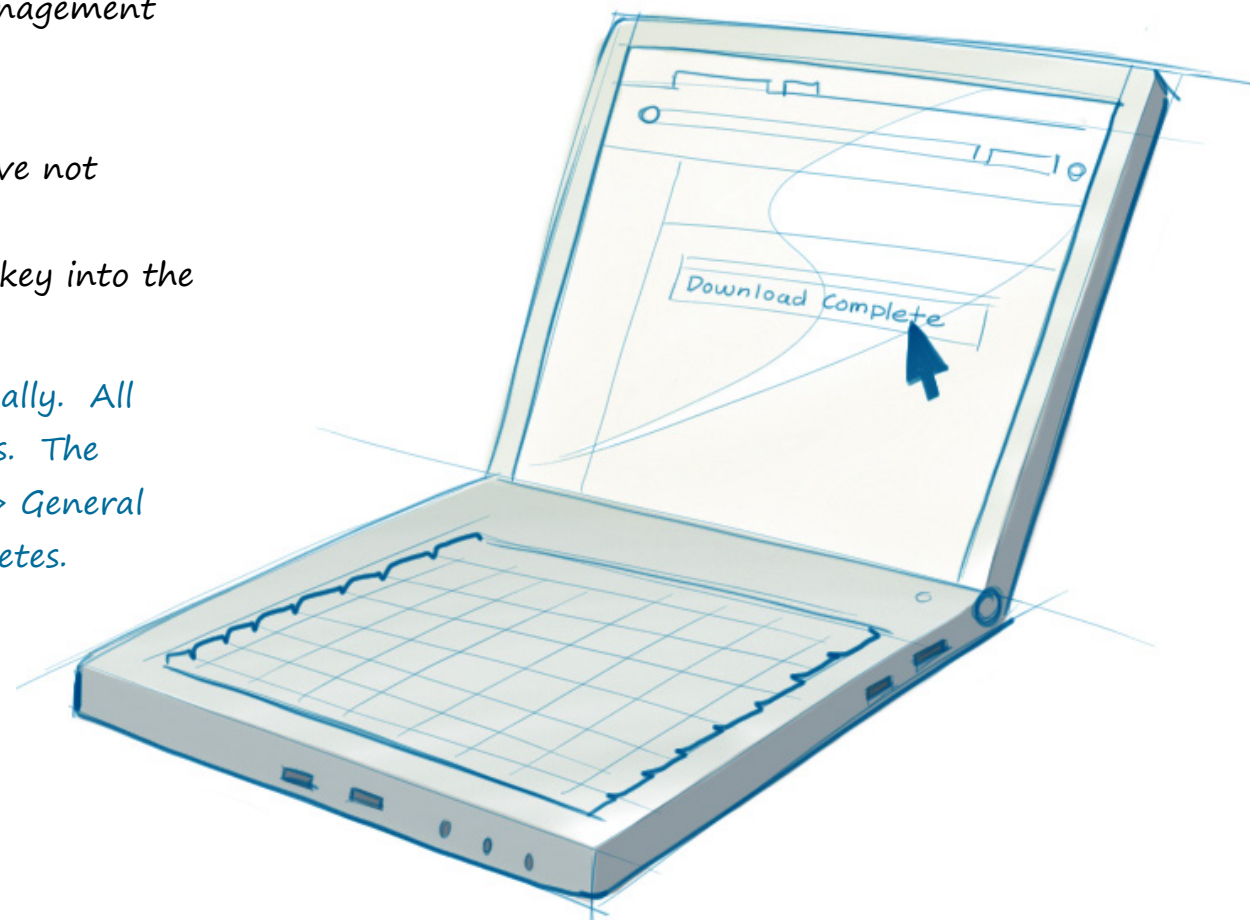

You Are Done!

Deployment Reference Sheet

Websense blueSKY Security Gateway:

Logon portal URL: <https://bluesky.websense.net/portal>

Appliance Outbound Traffic Interface (B1, B2):

IP address:

Subnet mask:

Default gateway:

VLAN tag (management traffic):

Appliance Management Interface (C1):

IP address:

Subnet mask:

DNS Servers:

Primary DNS:

Secondary DNS:

Tertiary DNS:

Appliance Information

Logon URL:

Hostname:

Appliance manager user name is admin.

Support and Resources

Getting Started Guide
www.websense.com/library/

Online Support and Contact Information
support.websense.com